

104295917
M52900 MAPLE GROVE

ONE CALL:
Hennepin
*SW3 T119/R22

* = this Page

LEGEND:

- ACTIVE
- DESIGNED
- PROPOSED
- ABANDONED
- ABANDONED

- Interruptible
- Existing
- Normal
- Future
- Proposed

Address: 13501 TERRITORIAL RD
Customer: Territorial Greens Apt
Contact Person: Gary Brummer
Contact Phone: 612-669-1800
Sales Rep: Grant Dhein
Sales Rep Phone: 612-861-8455
Construction Hotline: 612-321-5310
Copies To Pipeline Integrity: No
Curb Valve: No
Copies to Corrosion: No
Corrosion Approval: N/A
Follow Internal Pipe Sampling Requirements? No
Job Briefing Required? No
GFIP#: N/A
Permits: Yes - City Of Maple Grove
Requested Install Date: 09/25/2022

Approval: *Tracie Killion*

PROJECT DESCRIPTION:
TERRITORIAL GREENS APTS

DESIGNER: Carly Zimmerman
PHONE #: 612-321-5529
DRAWN BY: Carly Zimmerman
DESIGN DATE: 8/17/2022

Revised Print
Destroy All Others
Revision History
Date:
Description:
Design Approval:

IC Services
SCAN DATE: 1" : 90'
SHEET 1 OF 1


M/I METER WO# 104295913
INSTALL a 3MTC METERSET for TEMP HEAT on a TEMP HEAT BOARD, with a 2" CS820IR REGULATOR at CL-6 to 2 PSI with a 1/4" ORIFICE (LOAD: 2000cfh), with a BYPASS. METERSET EQUIP# 15779577

SERVICE WO# 104295917
INSTALL SVC to TEMP HEAT BOARD LOCATION.
INSTALL a 2" x 1-1/4" IPS PE SVC TEE with a .80" TAP
INSTALL a 2" IPS EFV - 5500 SERIES 1-1/4" ASSEMBLY in the BLVD.
INSTALL 675' of 1-1/4" IPS PE CL-6 SVC LINE with a 1-1/4" MPT x 1-1/4" IPS PE ANODELESS RISER, with SLEEVE.
SERVICE EQUIP# 70651604

Project area cleared for internal impacts. Pipe being removed is unregulated for disposal if coating does not exist or is non-asbestos. Refer to CNP Construction and Service Manual CS-B-1.110, CS-B-1.330, and CS-B-1.100, for pipe to be abandoned.

NOTE: BORE ALL PAVED STREETS AND DRIVEWAYS
Minimum depth requirements for crossings of state highways and county roads is 60". Minimum depth requirements for crossings of city streets and township roads is 48".
Minimum depth for parallel installations on state highways and county roads is 36". Minimum depth for parallel installations on city streets and township roads is 30". All steel pipe welds to be coated with 2 part epoxy.

PLACE METER ON TEMP BOARD
COORDINATE EXACT METER LOCATION

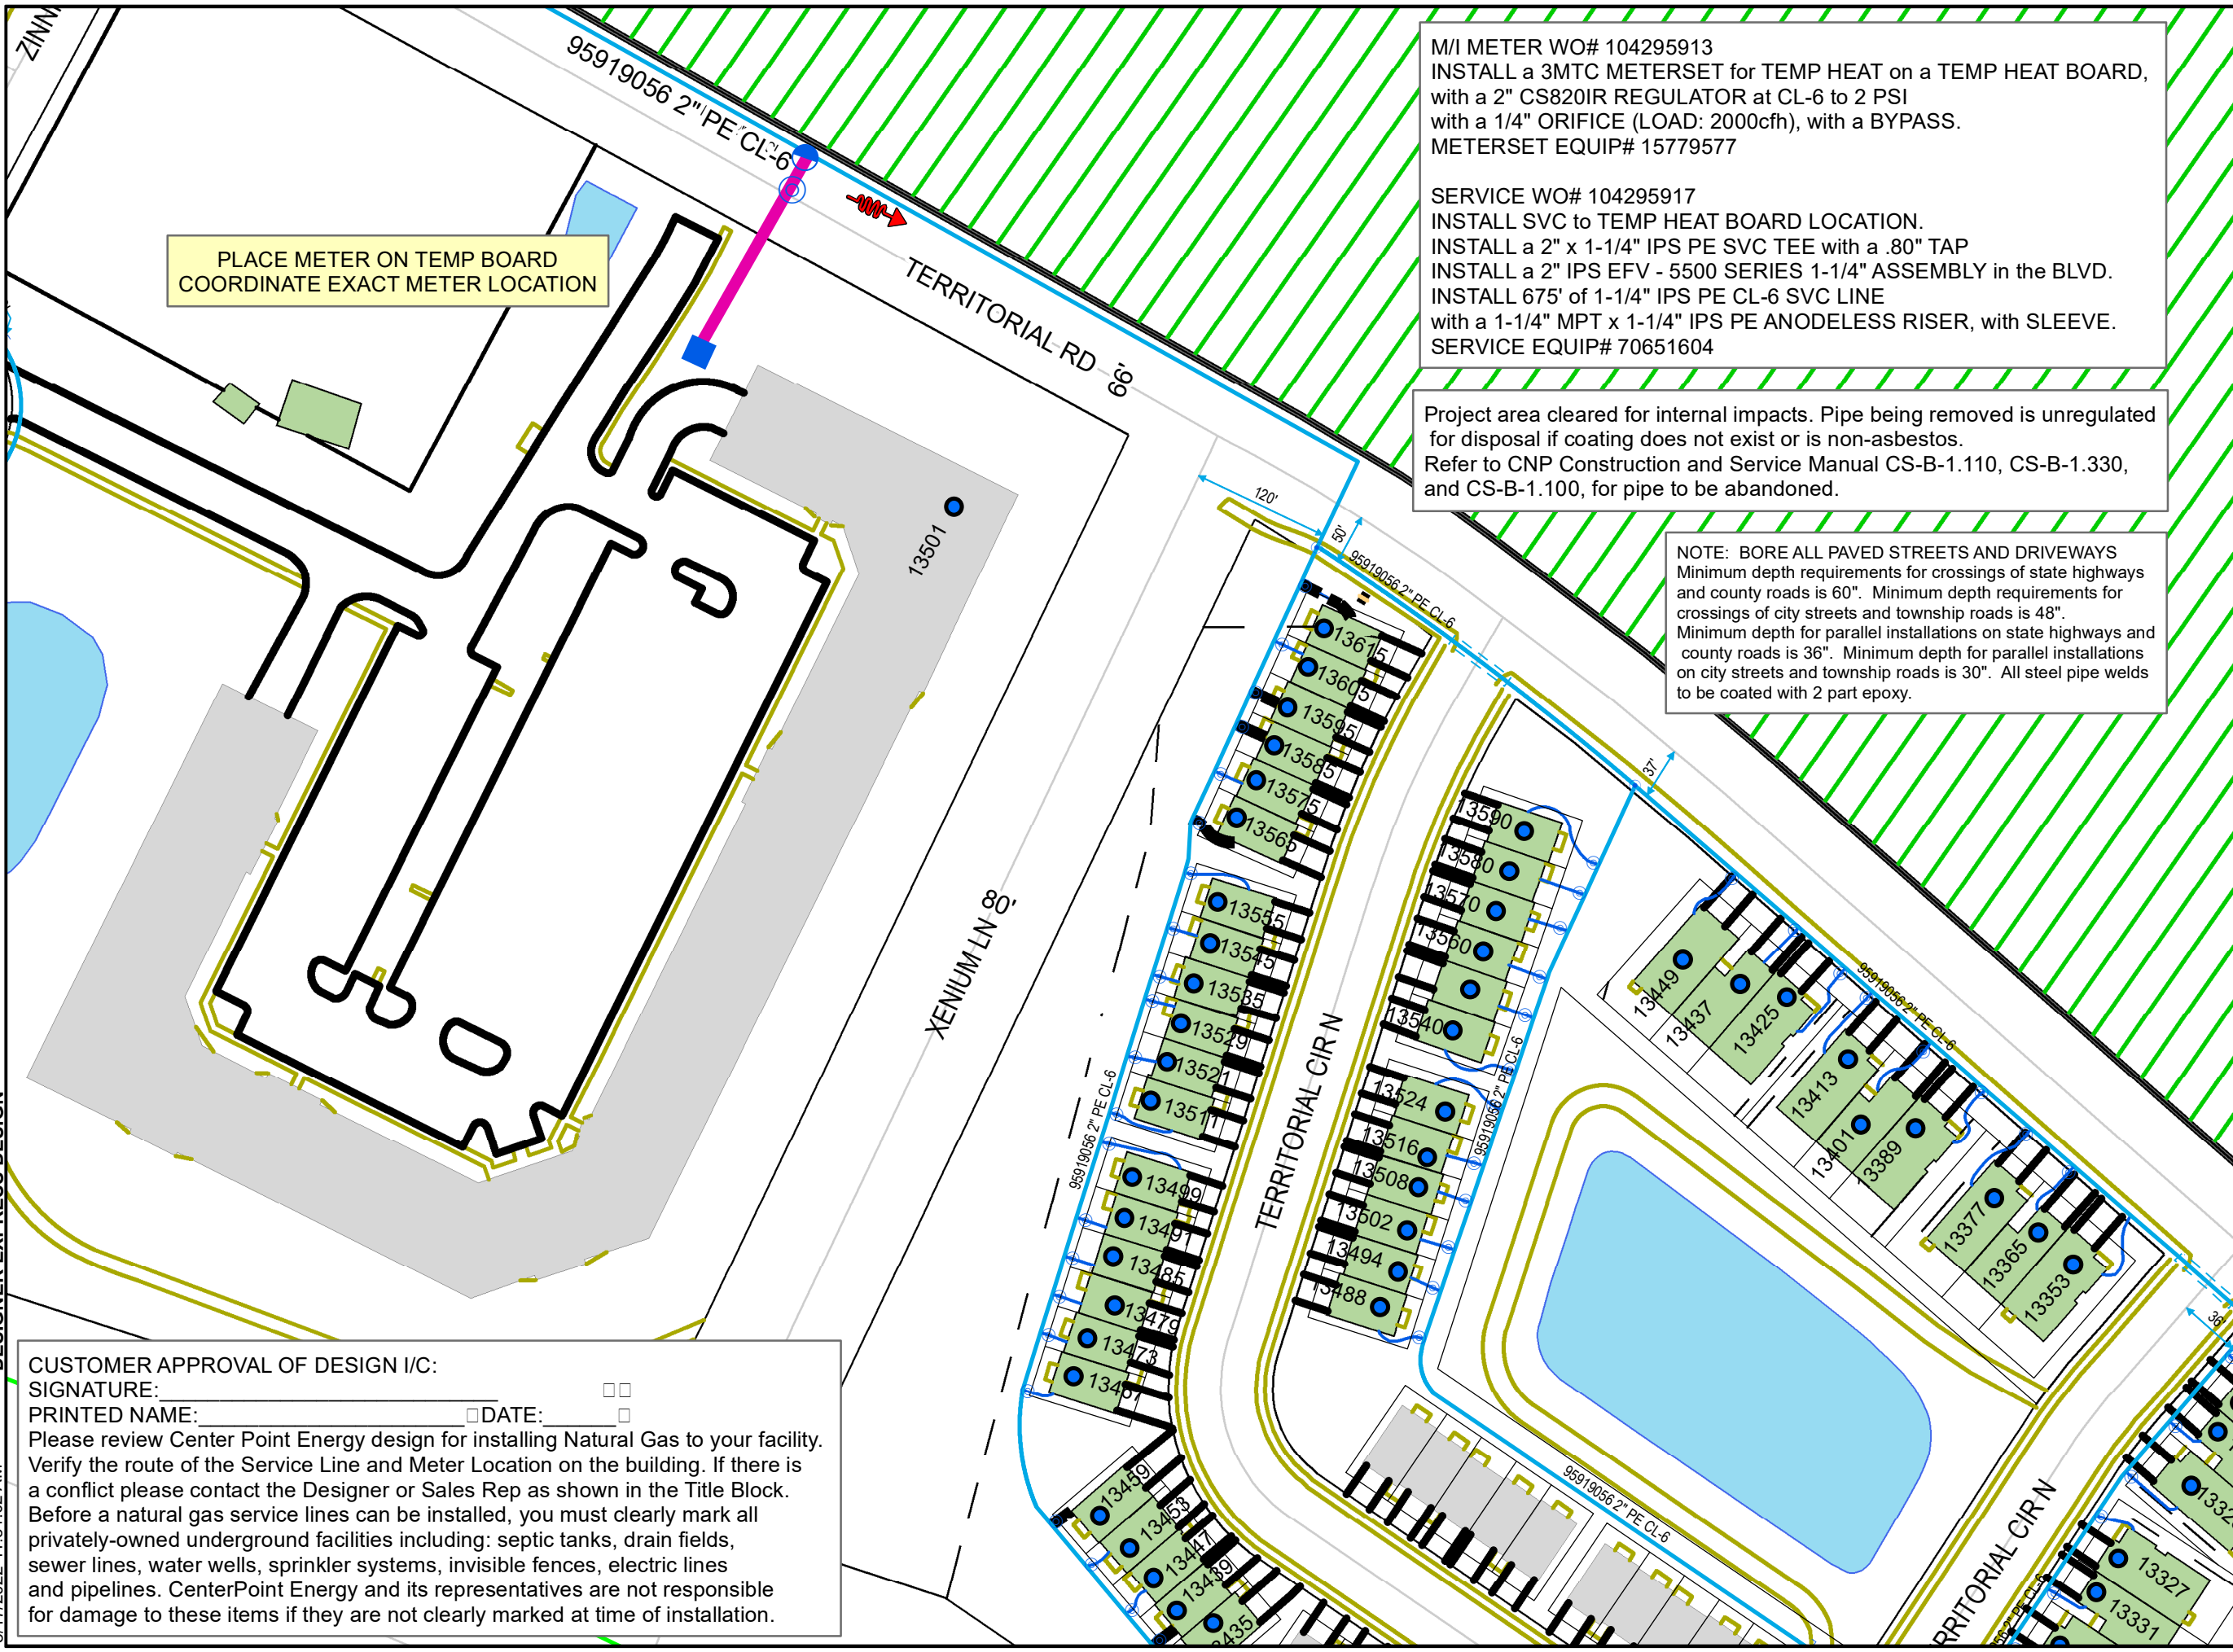

CUSTOMER APPROVAL OF DESIGN I/C:
SIGNATURE: _____
PRINTED NAME: _____ DATE: _____
Please review Center Point Energy design for installing Natural Gas to your facility. Verify the route of the Service Line and Meter Location on the building. If there is a conflict please contact the Designer or Sales Rep as shown in the Title Block. Before a natural gas service lines can be installed, you must clearly mark all privately-owned underground facilities including: septic tanks, drain fields, sewer lines, water wells, sprinkler systems, invisible fences, electric lines and pipelines. CenterPoint Energy and its representatives are not responsible for damage to these items if they are not clearly marked at time of installation.

DESIGNER EXPRESS DESIGN
8/17/2022 11:31:02 AM